

Pipe Size:	4.500 in	Grade:	S135	Range:	2
Pipe Weight:	16.60 lb/ft	Upset:	IEU	Connection:	DS40

Pipe

		NEW	API PREMIUM
Pipe size	<i>in</i> 4.500	OD <i>in</i> 4.500	4.365
Pipe weight	<i>lb/ft</i> 16.60	Thickness <i>in</i> 0.337	0.270
Upset Type	IEU	X-Sec Area <i>in²</i> 4.407	3.469
Tube grade	S135	Section Modulus <i>in³</i> 4.271	3.347
Range	2	Polar Section Modulus <i>in³</i> 8.543	6.694
Tube Yield	<i>ksi</i> 135	Tensile Yield <i>lbs</i> 595,000	468,000
ID	<i>in</i> 3.826	Torsional Yield <i>ft-lbs</i> 55,500	43,500
		80% Torsional Yield <i>ft-lbs</i> 44,400	34,800
		Internal Pressure Yield <i>psi</i> 17,700	16,200
		Collapse Yield <i>psi</i> 16,800	11,000
		D/t 13.35	16.19
		Connection/Tube Torsional Ratio 0.638	

Tool Joint

		NEW
Connection Type	DS40	OD <i>in</i> 5.250
Material Yield Strength	<i>ksi</i> 130	Tensile Yield Strength <i>lbs</i> 840,800
OD	<i>in</i> 5.250	Torsional Yield Strength <i>ft-lbs</i> 35,400
ID	<i>in</i> 2.688	Recommended Makeup Torque <i>ft-lbs</i> 21,200
Pin Shoulder Angle	<i>deg</i> 18	
Pin Tool Joint Length	<i>in</i> 14.0	
Box Tool Joint Length	<i>in</i> 14.0	

Drill Pipe Assembly

Shoulder-Shoulder Length	<i>ft</i> 31.50	
Adjusted Weight	<i>lbs/ft</i> 18.81	
Closed End Displacement	<i>gal/ft</i> 0.851	<i>bbl/ft</i> 0.0203
Open End Displacement	<i>gal/ft</i> 0.287	<i>bbl/ft</i> 0.0068
Fluid Capacity	<i>gal/ft</i> 0.563	<i>bbl/ft</i> 0.0134
Drift Size	<i>in</i> 2.563	


The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.


The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication

Pipe Size: 4.500 in Grade: S135 Range: 2
 Pipe Weight: 16.60 lb/ft Upset: IEU Connection: DS40

Makeup Torque Then Tension Chart

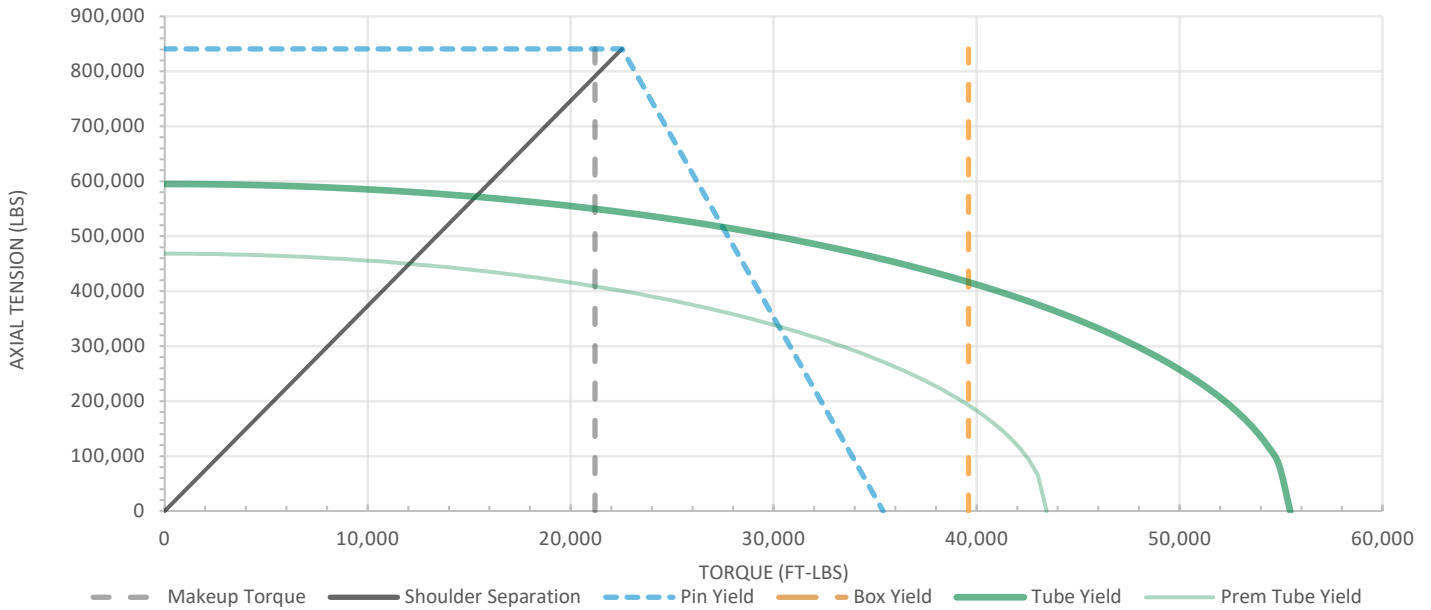

Connection Wear Chart

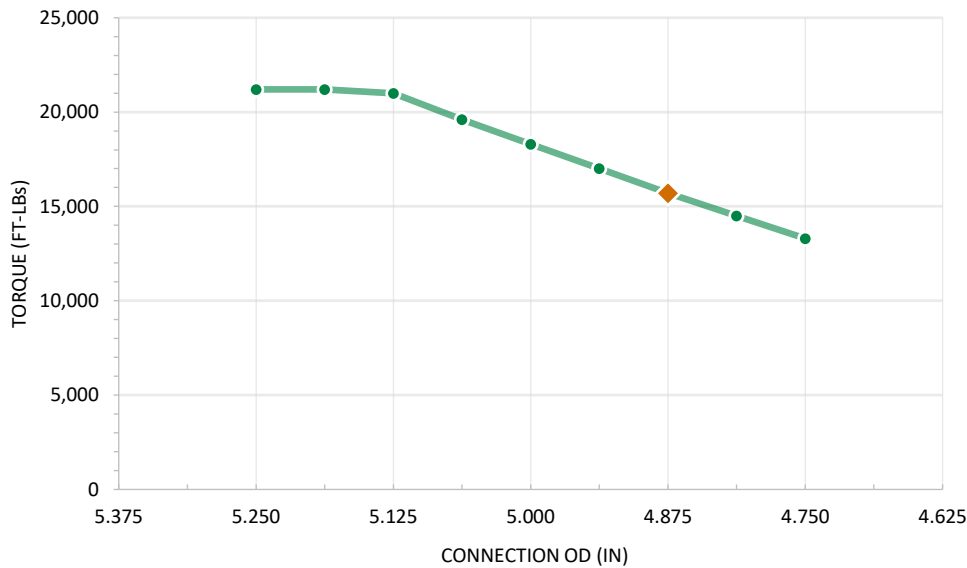

CONNECTION OD (in)	MAKEUP TORQUE (ft-lbs)
5.250	21,200
5.188	21,200
5.125	21,000
5.063	19,600
5.000	18,300
4.938	17,000
4.875	15,700
4.813	14,500
4.750	13,300
MIN REC OD (in)	4.875
MAKEUP TORQUE (ft-lbs)	15,700

The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.

The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication