

Pipe Size:	4.500 in	Grade:	S135	Range:	2
Pipe Weight:	20.00 lb/ft	Upset:	IEU	Connection:	DS40

### Pipe

		NEW	API PREMIUM
Pipe size	<i>in</i> 4.500	OD <i>in</i> <b>4.500</b>	4.328
Pipe weight	<i>lb/ft</i> 20.00	Thickness <i>in</i> <b>0.430</b>	0.344
Upset Type	IEU	X-Sec Area <i>in<sup>2</sup></i> <b>5.498</b>	4.306
Tube grade	S135	Section Modulus <i>in<sup>3</sup></i> <b>5.116</b>	3.977
Range	2	Polar Section Modulus <i>in<sup>3</sup></i> <b>10.232</b>	7.954
Tube Yield	<i>ksi</i> 135	Tensile Yield <i>lbs</i> <b>742,000</b>	581,000
ID	<i>in</i> 3.640	Torsional Yield <i>ft-lbs</i> <b>66,400</b>	51,600
		80% Torsional Yield <i>ft-lbs</i> <b>53,100</b>	41,280
		Internal Pressure Yield <i>psi</i> <b>22,600</b>	20,600
		Collapse Yield <i>psi</i> <b>23,300</b>	18,800
		D/t <b>10.47</b>	12.58
		Connection/Tube Torsional Ratio <b>0.533</b>	

### Tool Joint

		NEW
Connection Type	DS40	OD <i>in</i> <b>5.250</b>
Material Yield Strength	<i>ksi</i> 130	Tensile Yield Strength <i>lbs</i> <b>840,800</b>
OD	<i>in</i> 5.250	Torsional Yield Strength <i>ft-lbs</i> <b>35,400</b>
ID	<i>in</i> 2.688	Recommended Makeup Torque <i>ft-lbs</i> <b>21,200</b>
Pin Shoulder Angle	<i>deg</i> 18	
Pin Tool Joint Length	<i>in</i> 14.0	
Box Tool Joint Length	<i>in</i> 14.0	

### Drill Pipe Assembly

Shoulder-Shoulder Length	<i>ft</i> <b>31.50</b>	
Adjusted Weight	<i>lbs/ft</i> <b>22.10</b>	
Closed End Displacement	<i>gal/ft</i> <b>0.851</b>	<i>bbl/ft</i> 0.0203
Open End Displacement	<i>gal/ft</i> <b>0.338</b>	<i>bbl/ft</i> 0.0080
Fluid Capacity	<i>gal/ft</i> <b>0.513</b>	<i>bbl/ft</i> 0.0122
Drift Size	<i>in</i> <b>2.563</b>	


The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.


The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication

Pipe Size: 4.500 in      Grade: S135      Range: 2  
 Pipe Weight: 20.00 lb/ft      Upset: IEU      Connection: DS40

### Makeup Torque Then Tension Chart

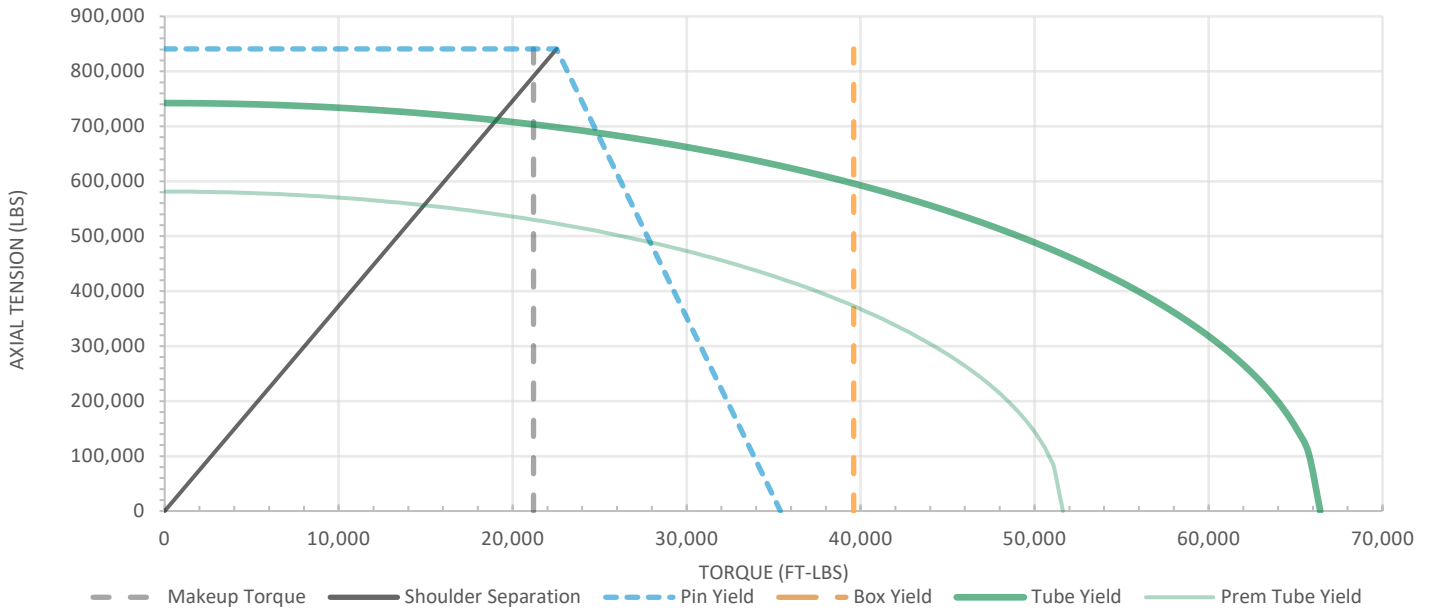

### Connection Wear Chart

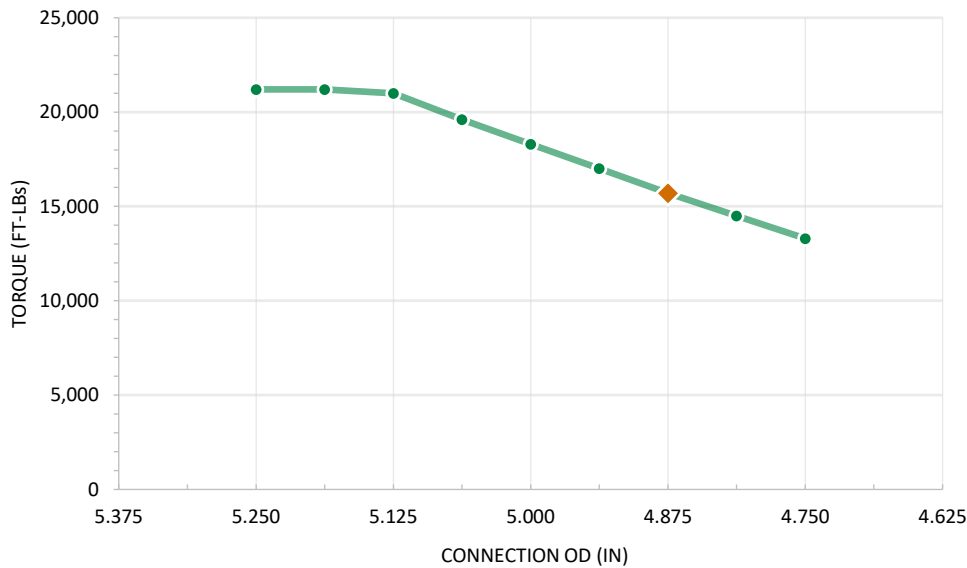

CONNECTION OD (in)	MAKEUP TORQUE (ft-lbs)
5.250	21,200
5.188	21,200
5.125	21,000
5.063	19,600
5.000	18,300
4.938	17,000
4.875	15,700
4.813	14,500
4.750	13,300
<b>MIN REC OD (in)</b>	
4.875	15,700

The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.

The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication