

## DRILL PIPE PERFORMANCE DATA SHEET

Pipe Size: 5.500 in (140mm)      Grade: S135      Range: 2  
 Pipe Weight: 24.7lb/ft (36.76kg/m)      Upset: IEU      Connection: 580 DUO

### Pipe

CDN

						NEW	API PREMIUM	
Pipe size	<i>in</i>	5.500	<i>mm</i>	139.7	OD	<i>mm</i>	139.7	135.5
Pipe weight	<i>lb/ft</i>	24.70	<i>kg/m</i>	36.76	Thickness	<i>in(mm)</i>	<b>0.415 (10.5)</b>	0.332 (8.4)
Upset Type		IEU			X-Sec Area	<i>cm<sup>2</sup></i>	<b>42.8</b>	33.7
Tube grade		S135			Section Modulus	<i>cm<sup>3</sup></i>	<b>128.5</b>	100.7
Range		2			Polar Section Modulus	<i>cm<sup>3</sup></i>	<b>257.1</b>	201.4
Tube Yield	<i>MPa</i>	931			Tensile Yield	<i>kdaN</i>	<b>398</b>	313
ID	<i>mm</i>	118.6			Torsional Yield	<i>ft-lbs</i>	<b>101,800</b>	79,800
					80% Torsional Yield	<i>ft-lbs</i>	<b>81,400</b>	63,840
					Internal Pressure Yield	<i>MPa</i>	<b>122.7</b>	112.4
					Collapse Yield	<i>MPa</i>	<b>117.2</b>	77.2
					D/t		<b>13.25</b>	16.07
					Connection/Tube Torsional Ratio		<b>1.015</b>	1.294

### Tool Joint

CDN

						NEW	
Connection Type		580 DUO			OD	<i>mm</i>	<b>177.8</b>
Material Yield Strength	<i>MPa</i>	931			Tensile Yield Strength	<i>kdaN</i>	<b>653</b>
OD	<i>mm</i>	177.8			Torsional Yield Strength	<i>ft-lbs</i>	<b>103,300</b>
ID	<i>mm</i>	108.0					
Pin Shoulder Angle	<i>deg</i>	18			Recommended Makeup Torque(60% TYS)	<i>ft-lbs</i>	<b>62,000</b>
Pin Tool Joint Length	<i>mm</i>	356			Max Makeup Torque(65% TYS)	<i>ft-lbs</i>	<b>67,200</b>
Box Tool Joint Length	<i>mm</i>	356					

### Drill Pipe Assembly

CDN

Shoulder-Shoulder Length	<i>m</i>	<b>9.60</b>		
Adjusted Weight	<i>kg/m</i>	<b>41.43</b>		
Closed End Displacement	<i>L/m</i>	<b>16.11</b>	<i>m<sup>3</sup>/m</i>	<b>0.01611</b>
Open End Displacement	<i>L/m</i>	<b>5.28</b>	<i>m<sup>3</sup>/m</i>	<b>0.00528</b>
Fluid Capacity	<i>L/m</i>	<b>10.83</b>	<i>m<sup>3</sup>/m</i>	<b>0.01083</b>
Drift Size	<i>mm</i>	<b>104.8</b>		


The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.

The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication


### Makeup Torque Then Tension Chart

CDN

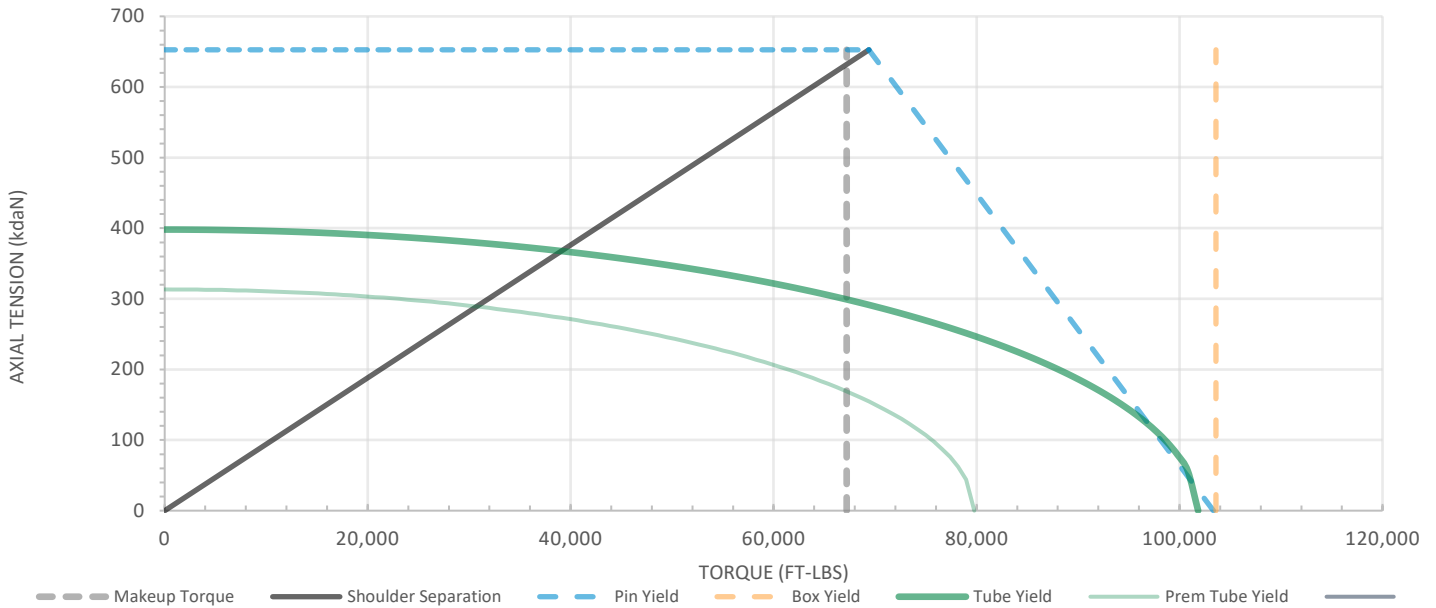

### Connection Wear Chart

CDN

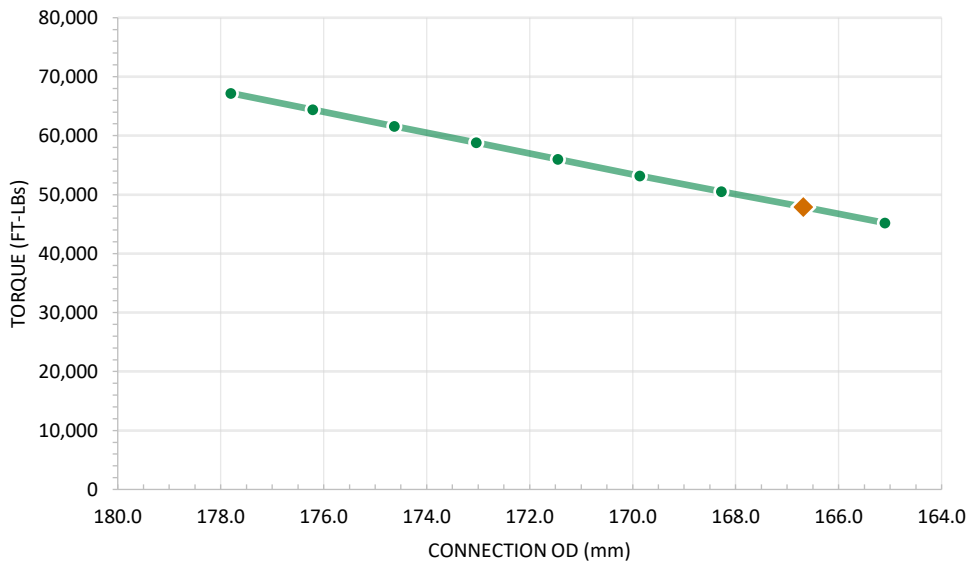

CONNECTION OD (mm)	MAXIMUM MAKEUP TORQUE (ft-lbs)
177.8	67,200
176.2	64,400
174.6	61,600
173.0	58,800
171.5	56,000
169.9	53,200
168.3	50,500
166.7	47,900
165.1	45,200
<b>MIN REC OD (mm)</b>	<b>47,900</b>
166.7	47,900

The information contained in this data sheet and other attached documentation is for reference use only. It is not intended to imply any explicit recommendation regarding processes, procedures, or performance of the end product. It is the responsibility of the end user to verify and determine the appropriate use of the technical information - no expressed or implied warranty by Complete Tubular Products is intended.

Calculations are based on uniform wall thickness and outside diameter – no safety factor has been applied. The information provided for inspection classes is based on uniform wear and is not intended to recommend or confirm operational limits of any used product. It is recommended that drilling torque not exceed 80% of the makeup torque, however it is the responsibility of the end user to determine the acceptable use of the end product including appropriate performance ratings and safety factors where applicable. All connection torque calculations have been performed using a thread compound friction factor of 1.0. Complete Tubular Products does not endorse any specific thread compound and waives all responsibility in determining appropriate makeup torque values for any specific drilling circumstance. Modifying makeup torque values for any reason shall be done at the end users discretion and risk.

The information in this publication is subject to change without notice, please contact Complete Tubular Products for the latest publication